

Suspension Kit

L-Bracket Roof & Wall Kit



Polyplas Suspension Kit for roof & wall projects provide a secure engineered solution to swiftly suspend a wide range of panels. Provide your panel thickness to Polyplas to attain the correct kit size.


- Safe Working Load - 1125 kg
- Rod length Available - 150 mm - 7.0 m
- Wire Rope Length Available - 1 m - 12 m +
- Available in HDG, Zinc & Stainless Steel



Components



- Threaded Rod
- L-Bracket
- Mushroom Head
- Bolts x 3
- Washer x 2
- Plastic Crush Tube / Ferrule
- Gripple Hanger
- Gripple Wire Rope

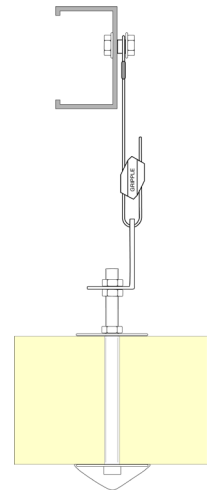

Product Variations

Product Code	L-Bracket	Wire Rope Size (MM)	Mushroom Head	Gripple Hanger (No.)	Threaded Rod (MM)
RSK HDG	Hot Dipped Galvanised	4.75	HDG	4	10
RSK Zinc	Zinc Plated	6	HDG	5	12
RSK SS	Stainless Steel	4.75	HDG	4	10

Note: Kits available in multiple configurations, speak to Polyplas to confirm best option.